


NACHI


Cermet NAX Series for Milling

Cermet NAX Series for Milling

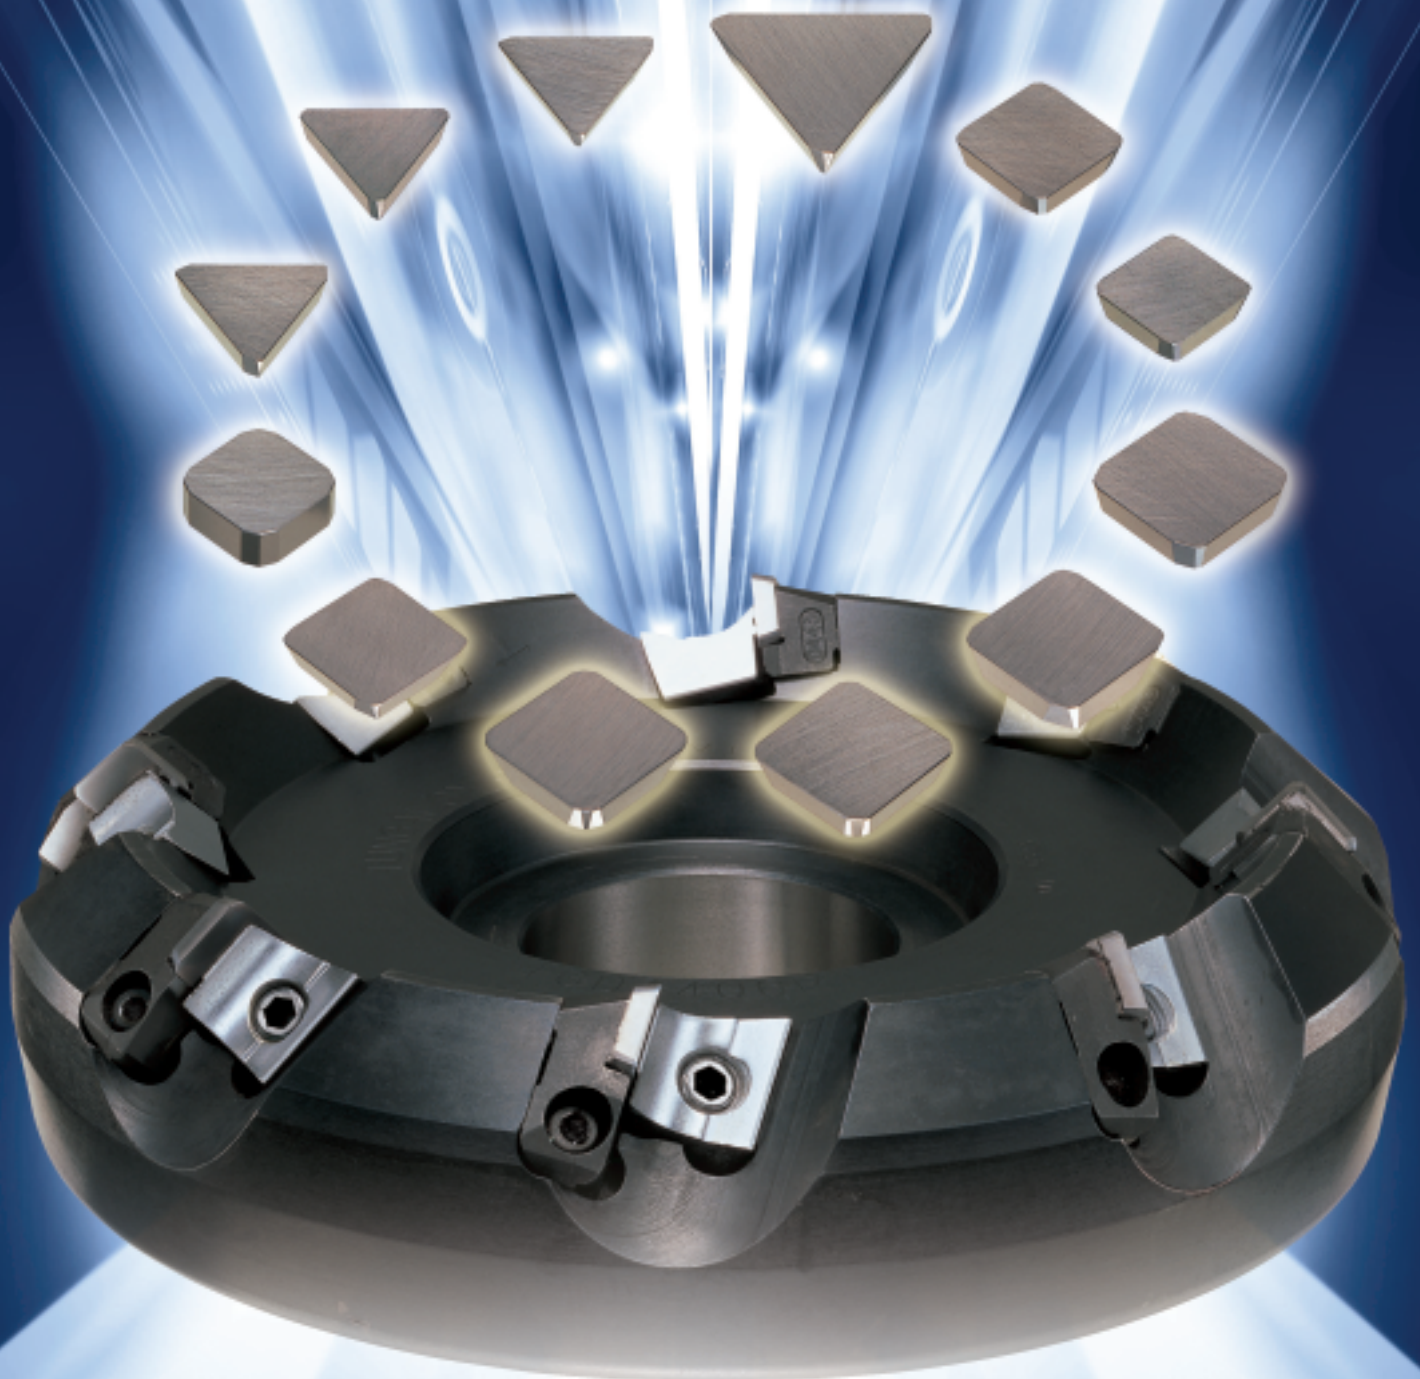


Cermet NAX Series for Milling

High-performance Cermet materials developed through harmonized technologies



The NAX series is developed as a series of Cermet material for cutting tools by Nachi's original sintering technology and traditional tool making expertise. Cermet has low affinity with steel to make a good cutting surface. There are five different grades of material for various applications. The NAX series Cermet supports a wide range of demands for turning work and milling work.

Electron microscope image of NAX LL, SS alloy structure

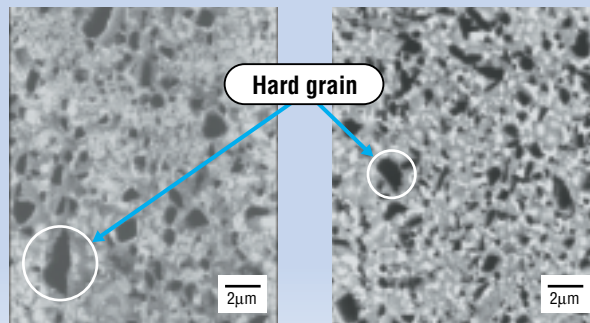


NAX SS has a high nitrogen content, so it has tough and very fine hard grains in its microstructure. It shows high anti-chipping performance at milling work.



NAX Series Features

Cutting application	Cermet grade name	Physical and mechanical properties			Cutting characteristics	Characteristics and applications
		Specific gravity g/cm ³	Hardness HRA	T.R.S. kgf/mm ²		
Milling	NAX SS	7.15	91.5	200	<div style="display: flex; justify-content: space-around; align-items: center;"> <div style="text-align: center;"> <p style="writing-mode: vertical-rl; transform: rotate(180deg);">Lough work</p> <p style="writing-mode: vertical-rl; transform: rotate(180deg);">Finishing work</p> </div> <div style="text-align: center;"> <p style="writing-mode: vertical-rl; transform: rotate(180deg);">Greater anti-chipping</p> <p style="writing-mode: vertical-rl; transform: rotate(180deg);">Greater wear resistance</p> </div> </div>	Extremely effective for particularly heavy milling or intermittent turning work. The best grade for intermittent cutting. (Grade toughest for milling work and intermittent turning)
General purpose	NAX LL	7.25	92.0	180		General purpose grade with a good balance of wear resistance and toughness for both turning and milling work. (Grade for both turning and milling work)
	NAX FF	6.80	92.0	170		Applies to various applications for finish and normal continuous cutting. Shows both high wear resistance and high heat crack resistance. (Grade for general purpose)
Finishing turning	NAX MM	6.70	92.5	160		Has good abrasion resistance at medium speed, normal cutting. An improved grade from old NAXM, with greater toughness. (Grade for finish and normal cutting)
	NAX T	7.25	92.5	150		Shows superior performance at high and medium speed, finish cutting. Has particularly good wear resistance. (Grade with high wear resistance for finish cutting)

Ranges of Targeted Cutting Applications

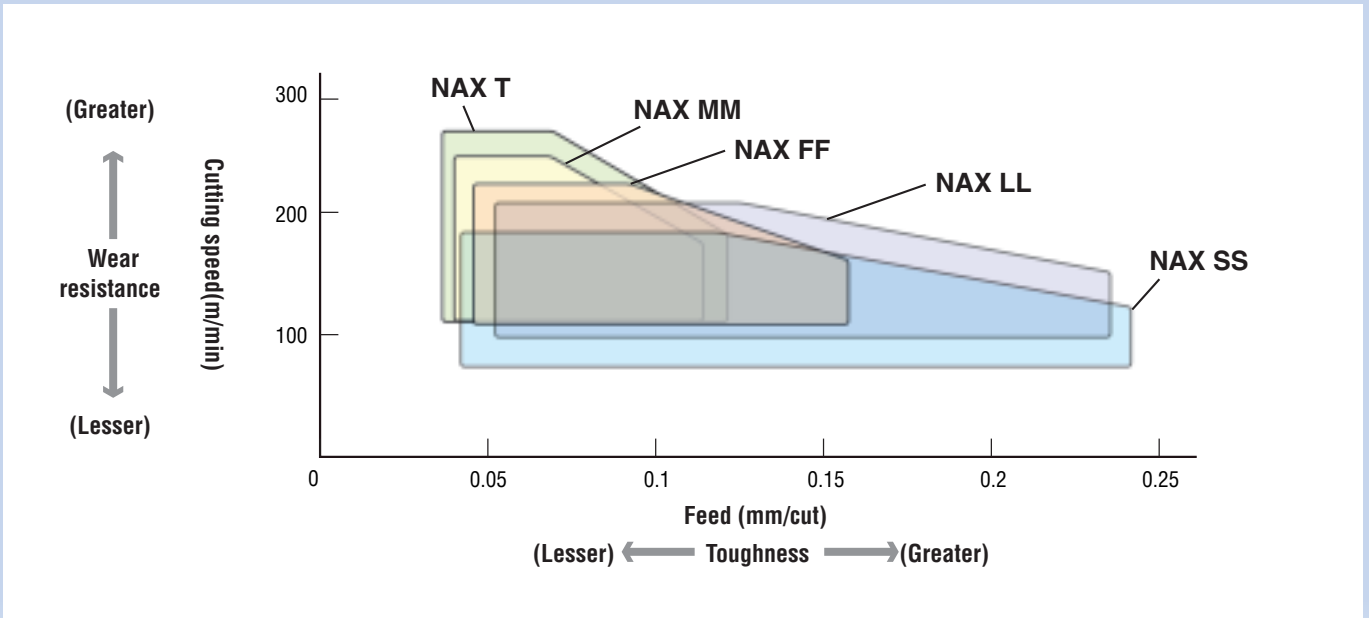

Cutting performance comparisons with similar grades

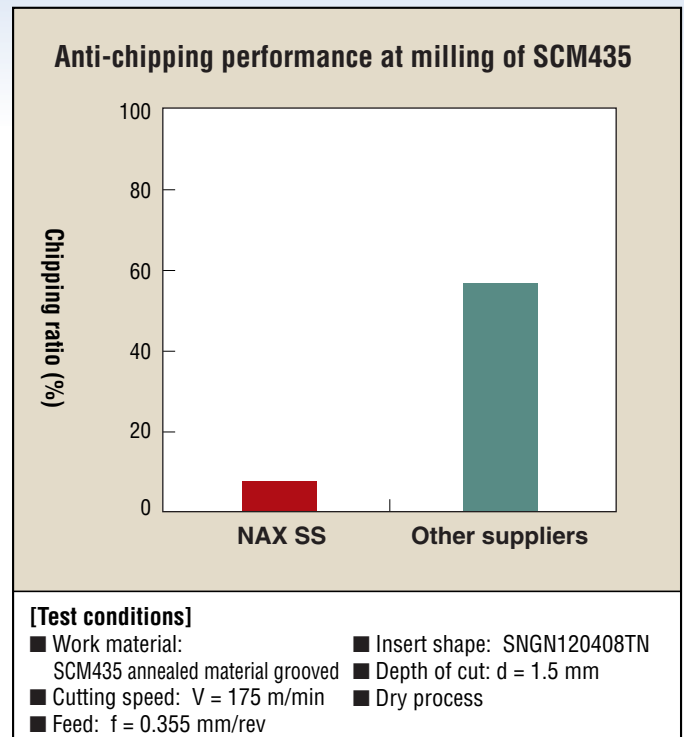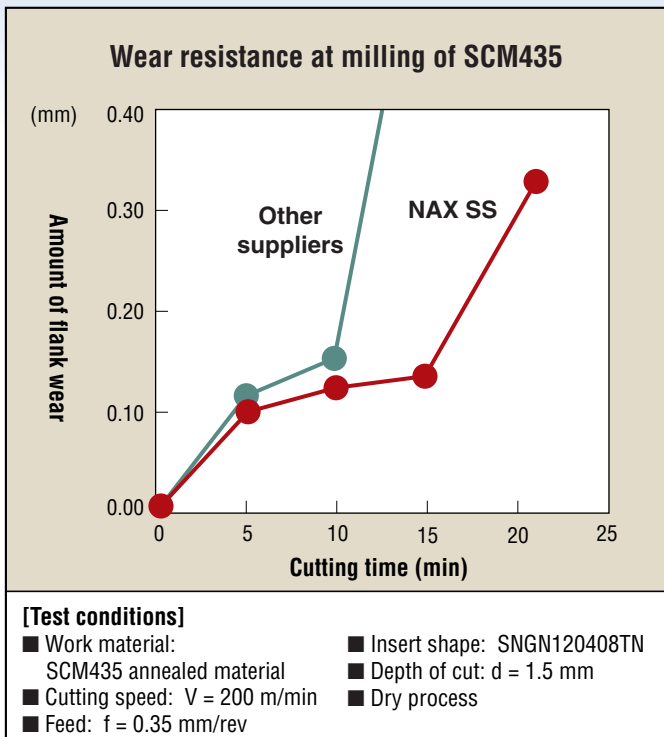

Targeted Cutting Conditions

Work material			Cutting conditions: cutting speed (m/min)			
Type of material		Corresponding JIS symbol	Brinell hardness HB	Feed (mm/cut)		
				0.4	0.3	0.1
Structural carbon steels	Annealed	SS400,S10C	~100	100	200	280
		S15C	130	90	150	200
		S35C	150	80	130	170
		S55C	170	70	120	160
Alloy steels	Annealed Tempered	SUJ	190~210	70	110	170
		SCM	225~325	70	110	160
		SNCM	325~450	60	100	150
Tool steels	Annealed Tempered	SK	260~300	75	100	150
		SKD	300~400	70	100	140


Comparison of Cermet Materials Grades by Manufacturer

Grades for turning
 Grades for milling

Area of application	← Continuous finishing cutting			Intermittent high-feed cutting →		
	← Greater wear resistance			Greater toughness →		
	P05	P10	P15	P20	P25	P30
Nachi-Fujikoshi	NAX T		NAX MM		NAX LL	
			NAX FF		NAX SS	
Sumitomo Electric	T110A		T1200A		T130A	
					T250A	
Tungaloy	NS520		NS530		NS540	
Mitsubishi Materials	NX2525			NX55 → NX335		NX4545
Kyocera	N	TN30		TN60		TN100M
Hitachi Tool	CH350		CH550		CH570	

Note: Information in this table was taken from the catalogs of the relevant manufacturers without their approval.

Terminology

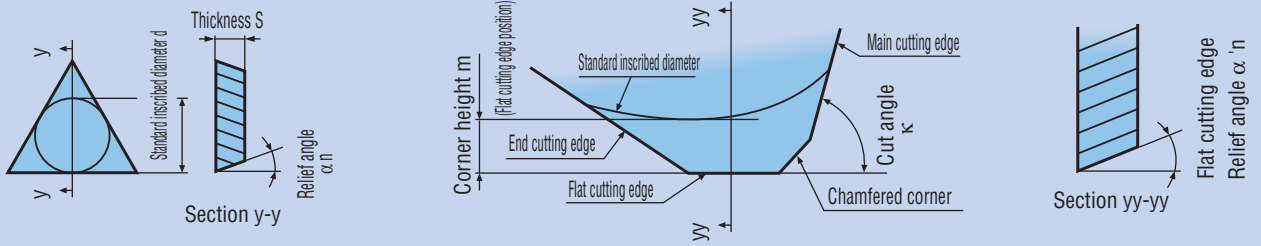

Insert identification system

Insert shape	
S	Square
T	Equilateral triangle

(1) Shape

Relief angle	
N	0°
A	3°
B	5°
C	7°
P	11°
D	15°
E	20°
F	25°
G	30°
O	Others

(2) Relief angle

Tolerance (mm)			
	Corner height (m)	Inscribed diameter (d)	Thickness (s)
A	±0.005	±0.025	±0.025
C	±0.013		
E	±0.025		

(3) Accuracy

	Bore		Chip breaker
	Yes/no	Shape	
N			No
R	No	—	Single face
F			Double face
W		Partial cylindrical bore chamfer 40 to 60°	No
T	Yes		Single face
B		Partial cylindrical bore chamfer 70 to 90°	No
H			Single face

(4) Groove/bore

Metric Series		Inch Series		Inscribed diameter dimensions (mm)
Square	Triangular			
06	11	2	6.35	
09	16	3	9.525	
12	22	4	12.70	
15	27	5	15.875	
19	33	6	19.05	

(5) Cutting length and inscribed diameter

① ② ③ ④ ⑤ ⑥ ⑦ ⑧ ⑨ ⑩

Metric series number: **T P E N 22 04 PD T R S**

Inch series number: **T P E N 4 3 Z T R S**

(6) Thickness		
Metric Series	Inch Series	Thickness (mm)
03	2	3.18
T3	—	3.97
04	3	4.76
06	4	6.35

(6) Thickness

(7) Corner configuration			
Corner radius		For flat cutting edges	
Metric Series	Inch Series	Old number	New number
Radius (mm)		Cut angle	Cut angle Flat cutting edge relief angle
00	0	Angle	Angle Angle
02	Y	H 75°	A 45° N 0°
04	1	E 65°	D 60° A 3°
08	2	G 65°	C 65° B 5°
12	3	P 45°	E 75° C 7°
16	4	Z Others	F 85° P 11°
20	5		G 87° D 15°
			P 90° E 20°
			Z Others F 25°
			G 30°
			Z Others

(7) Corner configuration

(8) Main cutting edge	
	Cutting edge form
F	Sharp cutting edge
E	Round cutting edge
T	Angular cutting edge
S	Composite cutting edge

(8) Main cutting edge

(9) Handedness	
	Handedness
R	Right
L	Left
N	No

(9) Handedness

(10) Auxiliary

	Visual appearance	Shape	JIS number		Material type	
			Metric Series	Inch Series	NAX LL	NAX SS
Square Positive insert		 TN type	SDEN 1203AE TN	SDEN 42P TN		
		 TNR type	SDEN 1203AE TNR	SDEN 42P TNR		
		 TNRS type	SDEN 1203AE TNRS	SDEN 42P TNRS		
		 Insert shape	SDCN 1504AZ TN	SDCN 53P TN		
		 Insert shape	SDEN 1504AZ TN	SDEN 53P TN		
		 Insert shape	SEEN 1203AF TN	SEEN 42P TN		
 Insert shape		SEEN 1203AF TNR	SEEN 42P TNR			
Square Negative insert		 Insert shape	SNEN 1204CN TN	SNEN 43G TN		
		 Insert shape	SNKN 1204CN TN	SNKN 43G TN		
Regular triangle Negative insert		 Insert shape	TPCN 2204PD TR(TL)	TPCN 43Z TR(TL)		
		 Insert shape	TPEN 2204PD TR(TL)	TPEN 43Z TR(TL)		

Standard in stock
 Made to order
 Some items available in stock

NACHI

NACHI-FUJIKOSHI CORP. (TOKYO HEAD OFFICE)

Shiodome Sumitomo Bldg., 1-9-2 Higashi-shinbashi, Minato-ku, Tokyo 105-0021
 Phone:+81-(0)3-5568-5240 Fax:+81-(0)3-5568-5236 URL:<http://www.nachi-fujikoshi.co.jp>

NACHI AMERICA INC.

17500 Twenty-Three Mile Road, Macomb, Michigan, 48044, U.S.A.
 Phone:+1-586-226-5151 Fax:+1-888-383-8665 URL:<http://www.nachiamerica.com/>

NACHI SINGAPORE PTE. LTD.

No.2 Joo Koon Way, Jurong Town, Singapore 628943, SINGAPORE
 Phone:+65-65587393 Fax:+65-65587371

NACHI EUROPE GmbH

Bischofstrasse 99, 47809, Krefeld, GERMANY
 Phone:+49-(0)2151-65046-0 Fax:+49-(0)2151-65046-90 URL:<http://www.nachi.de>

U.K. BRANCH

Unit7, Junction Six Industrial Estate, Electric Avenue, Birmingham B6 7JJ, U.K.
 Phone:+44-(0)121-250-1890 Fax:+44-(0)121-250-1889 URL:<http://www.nachi.co.uk>

CATALOG NO. S4205E

2008.1.X-SE-SE