


Double-row Angular Contact Ball Bearings for Car Air Conditioning Magnetic Clutch



1N=0.102kgf

Bearing No.		Boundary dimensions (mm)				Basic dynamic load rating Cer (N)	Basic static load rating Cor (N)
DST seals	DL seals	d	D	B	r (max)		
30BGS10G-2DST	30BGS10G-2DL	30	52	22	0.3	17900	13800
30BG05S5G-2DST	30BG05S5G-2DL	30	55	23	0.6	19900	15500
32BG05S1-2DST	—	32	55	23	0.6	19900	15500
35BG05S7G-2DST	35BG05S7G-2DL	35	50	20	0.3	11100	10100
35BG05S10G-2DST	30BG05S16G-2DL	35	55	20	0.6	15600	13200
38BG05S6G-2DST	38BG05S6G-2DL	38	54	17	0.3	11900	11500
40BG05S2G-2DST	—	40	57	24	0.3	17900	13800
40BGS8G-2DST	40BGS8G-2DL	40	62	20.625	0.65	18100	16400
40BGS35G-2DST	40BGS35G-2DL	40	62	24	0.6	18100	16400
40BGS39G-2DST	40BGS39G-2DL	40	66	24	0.6	28500	23100
45BG07S5G-2DST	45BG07S5G-2DL	45	75	32	0.5	33500	27600
75BG02G-2DST	—	75	130	50	2.0	93500	83500

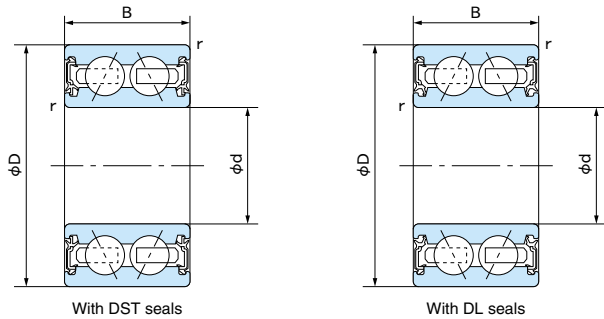