




Solenoid Controlled Relief Valve

30 to 380ℓ/min
21MPa


Features

- ① This valve adds a wet type solenoid valve to a balanced type piston type relief valve to form a hydraulic device unload circuit.
- ② The shockless type has an internal structure that prevents shock generated during unloading. This valve can also be used in a pressure relief circuit, and has a maximum adjustment time of three seconds. See the pressure relief circuit example.
- ③ A two-pressure control circuit can be configured by adding a relief modular valve. Contact your agent for more information.

(Two-pressure Control Circuit Example)

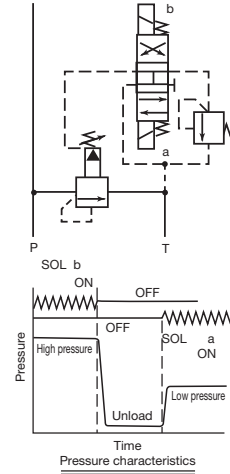

(Pressure Relief Circuit Example)

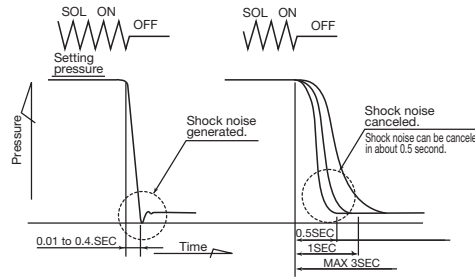

Specifications

Model No.		Nominal Diameter (Size)	Maximum Working Pressure MPa(kgf/cm ²)	Maximum Flow Rate ℓ/min	Pressure adjustment range MPa(kgf/cm ²)	Weight kg		JIS Symbol	Used Solenoid Valve Model Number
Screw Mounting	Gasket Mounting					T Type	G Type		
RSS (RSA) -T03-AQ ₃ ¹ -**-15	RSS (RSA) -G03-AQ ₃ ¹ -**-15	3/8	21 {214}	80	Type 1 0.8 to 7 {8.2 to 71.4}	3.2	4.5		SS (SA) -G01-A3X ¹ -**-31
RSS (RSA) -T06-AQ ₃ ¹ -**-23	RSS (RSA) -G06-AQ ₃ ¹ -**-23	3/4		170		4.0	6.4		
RSS (RSA) -T10-AQ ₃ ¹ -**-23	RSS (RSA) -G10-AQ ₃ ¹ -**-23	1 1/4		380		8.8	10.0		
RSS (RSA) -T03-AR ₃ ¹ -**-15	RSS (RSA) -G03-AR ₃ ¹ -**-15	3/8	21 {214}	80	Type 3 3.5 to 21 {35.7 to 214}	3.2	4.5		SS (SA) -G01-AR ¹ -**-31
RSS (RSA) -T06-AR ₃ ¹ -**-23	RSS (RSA) -G06-AR ₃ ¹ -**-23	3/4		170		4.0	6.4		
RSS (RSA) -T10-AR ₃ ¹ -**-23	RSS (RSA) -G10-AR ₃ ¹ -**-23	1 1/4		380		8.8	10.0		

Shockless Type

RSS (RSA) -T03- ₃ ¹ -F ¹ -**-15	RSS (RSA) -G03- ₃ ¹ -F ¹ -**-15	3/8	21 {214}	80	Type 1 1 to 7 {10.2 to 71.4}	4.2	5.5		SS (SA) -G01-A8X0 ¹ -**-31
RSS (RSA) -T06- ₃ ¹ -F ¹ -**-23	RSS (RSA) -G06- ₃ ¹ -F ¹ -**-23	3/4		170		5.0	7.4		
RSS (RSA) -T10- ₃ ¹ -F ¹ -**-23	RSS (RSA) -G10- ₃ ¹ -F ¹ -**-23	1 1/4		380		9.8	12.0		

Note) For information about electrical specifications, see the SS type and SA type solenoid valve items on pages E-1 and E-13.

● Handling

- ① To adjust pressure, loosen the lock nut and then rotate the adjusting bolt clockwise (rightward) to increase pressure or counterclockwise (leftward) to decrease it.
- ② To adjust the time from onload to unload, loosen the lock nut and rotate the restrictor adjusting bolt clockwise (rightward) to make the time longer, or counterclockwise (leftward) to make it shorter.
- ③ Make sure that tank port back pressure is no greater than 0.2MPa {2.0kgf/cm²}.
- ④ The ** before the design number in the model number of the solenoid valve used shows voltage. See the voltage symbols in the model number explanation.
- ⑤ Pressure becomes unstable when at slow control flow rates. Use a flow rate of no less than 8 ℓ/min for the 03, 06 sizes, and 10 ℓ/min for the 10 size.
- ⑥ Use 90 to 110% of rated voltage.
- ⑦ The pressure adjustment range for the high vent type is 1.3MPa {13.3kgf/cm²}. Note that RSS (RSA) -T/G03 is not a high vent type.
- ⑧ Use the following table for specification when a sub plate is required.

Model No.	Pipe Diameter	Weight kg	Applicable Valve Type
MR-03-10	3/8	1.6	RSS (RSA) -G03-**-**-15
MR-06-20	3/4	3.5	RSS (RSA) -G06-**-**-23
MR-06X-20	1		
MR-10-20	1 1/4	8.5	RSS (RSA) -G10-**-**-23
MR-10X-20	1 1/2		

Note) See page relief valve page item on F-3 for dimensions.

- ⑨ The following are the bundled mounting bolts.


Model No.	Bolt Dimensions	Qty	Tightening Torque N·m(kgf·cm)
RSS (RSA) -G03-**-**-15	M10×75ℓ	4	45 to 55 {460 to 560}
RSS (RSA) -G06-**-**-23	M16×80ℓ	4	190 to 235 {1940 to 2400}
RSS (RSA) -G10-**-**-23	M20×105ℓ	4	370 to 460 {3770 to 4690}

Note) For mounting bolts, use bolts of 12.9 strength classification or equivalent.

- ⑩ The coil surface temperature increases if this pump is kept continuously energized. Install the valve so there is not chance of it being touched directly by hand.

Explanation of model No.


RSS(RSA) - G 06 - A Q 1 - (H) - C1 - 23

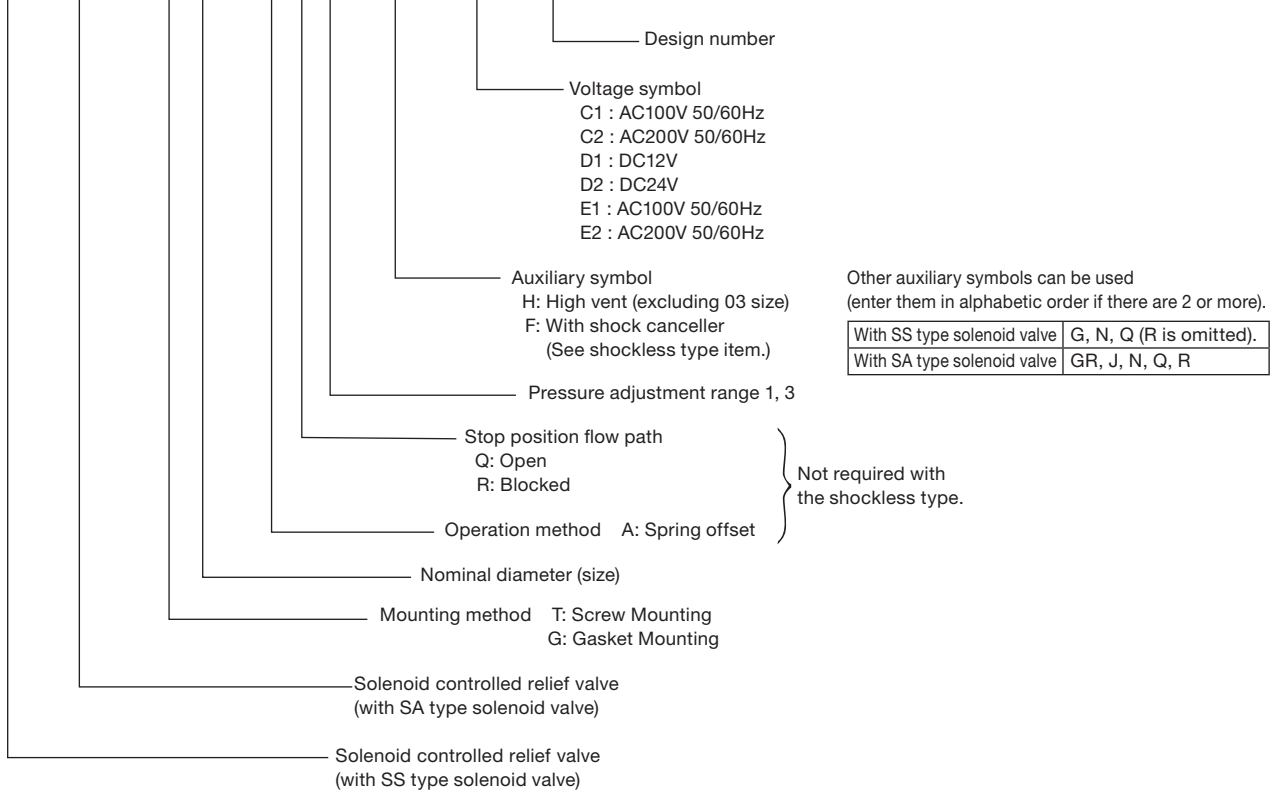

Installation Dimension Drawings

RSS -T**-A**-**-15, 23
 (RSA)


Note) Dimensions marked with Ⓢ are for the RSA type.
 Note) Dimensions in parentheses apply in the case of a DC solenoid valve.

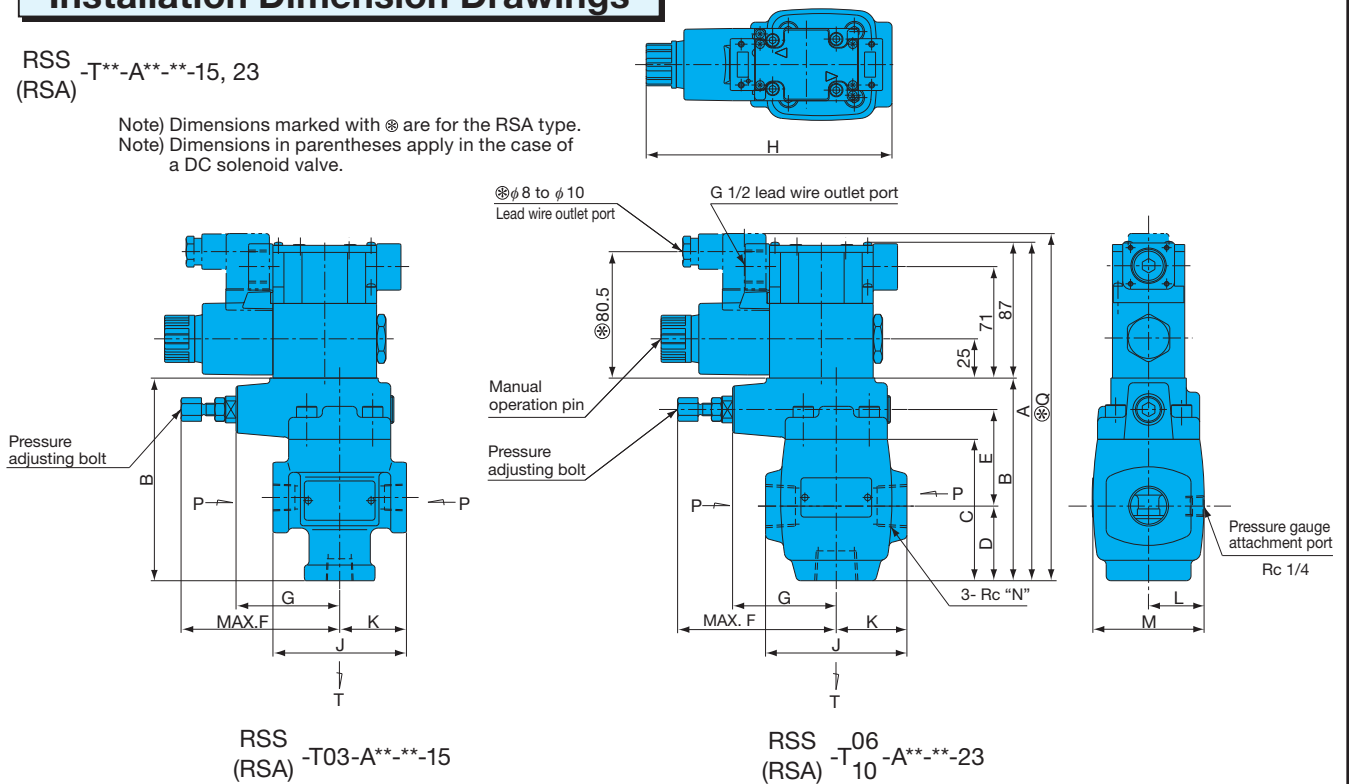

Model No.	A	B	C	D	E	F	G	H	J	K	L	M	N	Q
RSS (RSA) -T03-A**-**-15	214.5	129	90	53	56	101	66	154 (161)	85	42.5	32.5	65	3/8	221.5
RSS (RSA) -T06-A**-**-23	214.5	129	90	47.5	61.5	101	66	156.5 (163.5)	90	45	35.5	71	3/4	221.5
RSS (RSA) -T10-A**-**-23	239	153.5	111.5	62	72	98	63	164.5 (171.5)	125	62.5	47	94	1 1/4	246

RSS
(RSA) -G**-A**-**-15, 23

Note) Dimensions marked with Ⓜ are for the RSA type.
Note) Dimensions in parentheses apply in the case of a DC solenoid valve.

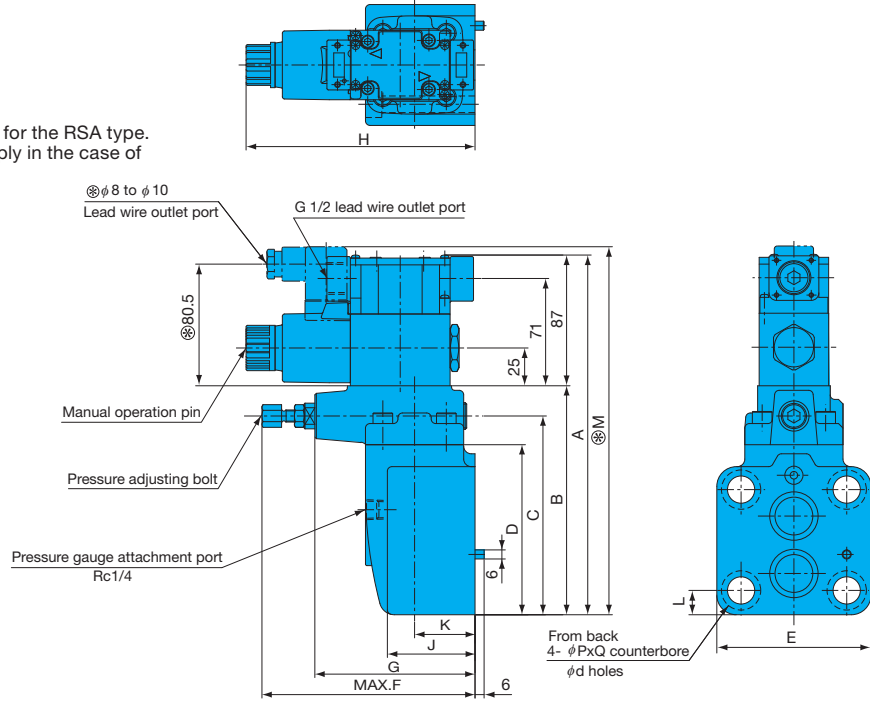


Model No.	A	B	C	D	E	F	G	H	J	K	L	P	Q	d	M
RSS (RSA) -G03-A**-**-15	214.5	129	109	90	80	141	106	150.5 (157.5)	72.5	40	13	17.5	10.8	11	221.5
RSS (RSA) -G06-A**-**-23	237	151.5	131.5	112.5	102	141	106	151.5 (158.5)	58	40	16.1	26	1	18	244
RSS (RSA) -G10-A**-**-23	248	162.5	143	120.5	127	148	113	152 (159)	80	50	17.7	32	1	22	255

Note) For gasket surface dimensions, see R-G**-* 12/20.

RSS
(RSA) -T**-*-F**-15, 23


Note) Dimensions marked with Ⓜ are for the RSA type.
Note) Dimensions in parentheses apply in the case of a DC solenoid valve.

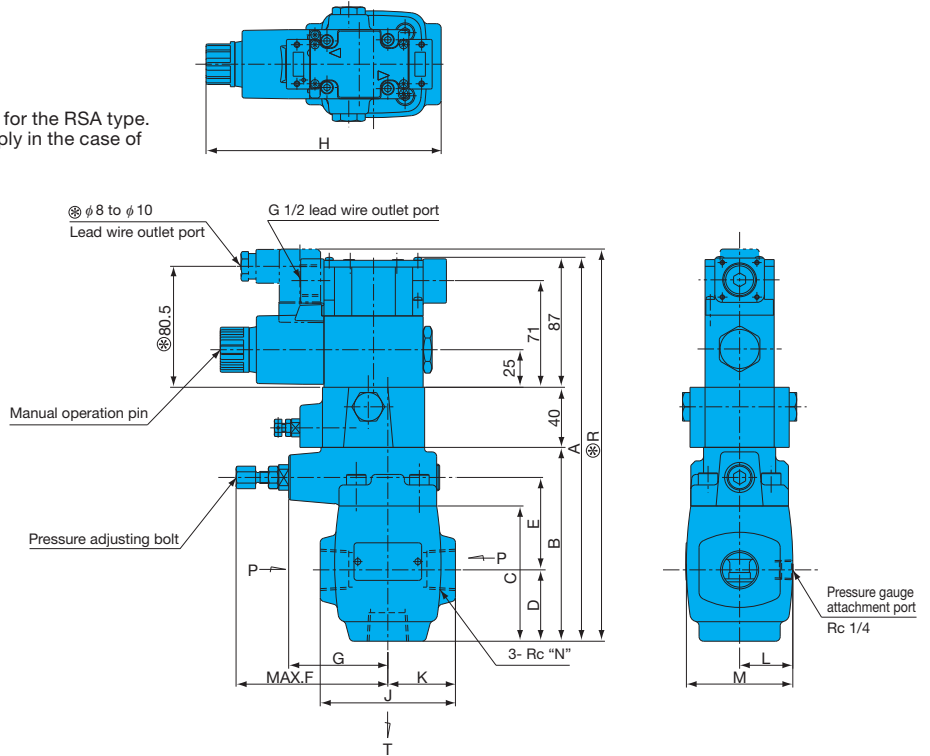

Model No.	A	B	C	D	E	F	G	H	J	K	L	M	N	Q	R
RSS (RSA) -T03-*-F**-15	254.5	129	90	53	56	101	66	154 (161)	85	42.5	32.5	65	32	3/8	261.5
RSS (RSA) -T06-*-F**-23	254.5	129	90	47.5	61.5	101	66	156.5 (163.5)	90	45	35.5	71	33	3/4	261.5
RSS (RSA) -T10-*-F**-23	279	153.5	111.5	62	72	98	63	164.5 (171.5)	125	62.5	47	94	32.5	1/4	286

RSS
(RSA) -G**-*-F**-15, 23

Note) Dimensions marked with Ⓢ are for the RSA type.
Note) Dimensions in parentheses apply in the case of a DC solenoid valve.

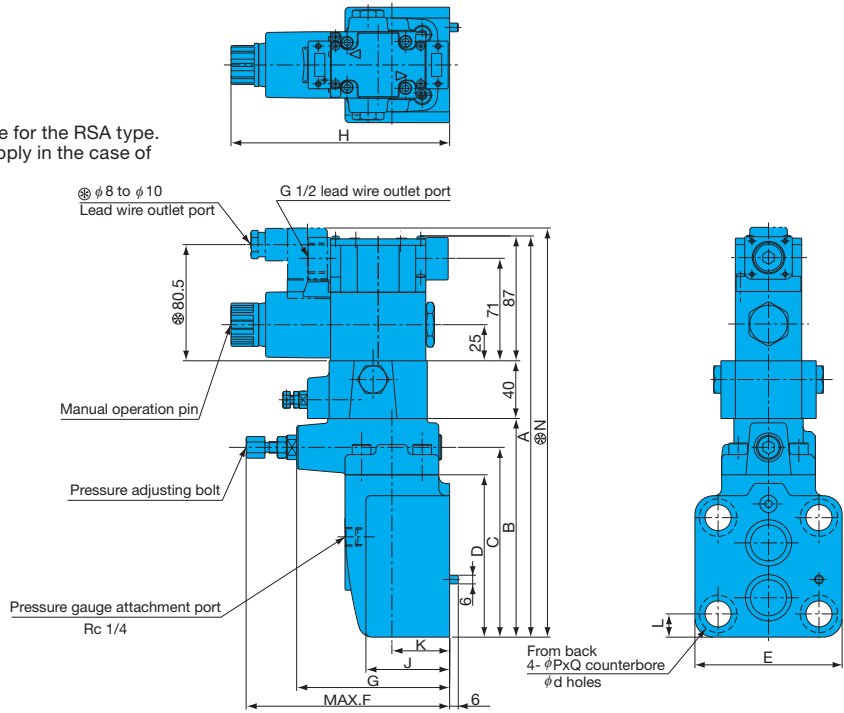


Model No.	A	B	C	D	E	F	G	H	J	K	L	M	N	P	Q	d
RSS (RSA) -G03-*-F**-15	254.5	129	109	90	80	141	106	150.5 (157.5)	72.5	40	13	32	261.5	17.5	10.8	11
RSS (RSA) -G06-*-F**-23	277	151.5	131.5	112.5	102	141	106	151.5 (158.5)	58	40	16.1	33	284	26	1	18
RSS (RSA) -G10-*-F**-23	288	162.5	143	120.5	127	148	113	152 (159)	80	50	17.7	32.5	295	32	1	22

Note) For gasket surface dimensions, see R-G**-* 12/20.

Cross-sectional Drawing

RSS-G**-*-F**-15, 23

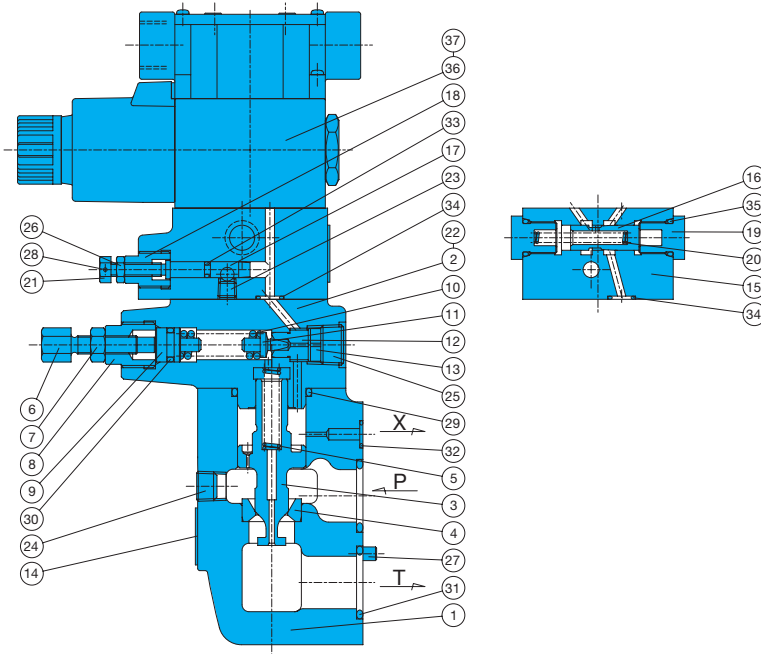

Part No.	Part Name	Part No.	Part Name
1	Body	20	Spring
2	Cover	21	Nut
3	Spool	22	Screw
4	Seat	23	Plug
5	Spring	24	Plug
6	Screw	25	Plug
7	Nut	26	Nut
8	Retainer	27	Spring pin
9	Plunger	28	Spring pin
10	Spring	29	O-ring
11	Poppet	30	O-ring
12	Seat	31	O-ring
13	Collar	32	O-ring
14	Nameplate	33	O-ring
15	Body	34	O-ring
16	Spool	35	O-ring
17	Throttle	36	Solenoid Valves
18	Retainer	37	Screw
19	Spring guide		

Seal Parts List (Kit Model Number RSBS-***F)

Part No.	Part Name	Type/Part Number			Q'ty
		RSS-G03-*F**-15	RSS-G06-*F**-23	RSS-G10-*F**-23	
29	O-ring	NBR-90 G30	NBR-90 G30	NBR-90 G40	1
30	O-ring	NBR-70-1 P11	NBR-70-1 P11	NBR-70-1 P11	1
31	O-ring	NBR-90 P20	NBR-90 P26	NBR-90 G35	2
32	O-ring	NBR-90 P7	NBR-90 P9	NBR-90 P9	1
33	O-ring	NBR-90 P4	NBR-90 P4	NBR-90 P4	1
34	O-ring	NBR-90 P9	NBR-90 P9	NBR-90 P9	2
35	O-ring	NBR-90 P12.5	NBR-90 P12.5	NBR-90 P12.5	2

- Note) 1. The materials and hardness of the O-ring conforms with JIS B2401.
 2. For the *** part of the kit number, specify the valve size (G03, G06, G10).
 3. SS (SA)-G01 pilot valve seal is available separately. For details, see pages E-11(E-23).

